

300-625^{Q&As}

Implementing Cisco Storage Area Networking (DCSAN)

Pass Cisco 300-625 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.certbus.com/300-625.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Cisco Official Exam Center

Instant Download After Purchase

100% Money Back Guarantee

- 😳 365 Days Free Update
- 800,000+ Satisfied Customers





QUESTION 1

Which component is initially responsible for loading the kickstart image on Cisco MDS Switches?

A. ROMMON		
B. BIOS		
C. NX-OS		
D. BASH		
Correct Answer: C		

QUESTION 2

A storage network engineer is implementing disk-array data replication between two SAN environments in two different data centers not connected via Fibre Channel. Which SAN switch feature must be implemented?

A. FCIP

- B. zoning merge over LAN
- C. VSAN scoping

D. IVR

Correct Answer: A

QUESTION 3

What is the function of the 0xFFFFC address in a Fibre Channel fabric?

- A. management server
- B. fabric controller
- C. name server
- D. time server
- Correct Answer: C

QUESTION 4

Which benefit of upgrading to the Cisco DCNM server-based advanced feature license for a Cisco MDS switch is correct?

A. The license can be reassigned when a switch is replaced with a newer version within the same product family.



- B. The license can be assigned to either server MAC address or switch serial number.
- C. An unlimited number of devices can be added to the list of licensed devices.
- D. The license can be reassigned when the switch is replaced with a Cisco Nexus switch.

Correct Answer: A

QUESTION 5

Which action must be performed to deactivate a VSAN without losing its configuration?


- A. Isolate it.
- B. Delete it.
- C. Rename it.
- D. Suspend it.
- Correct Answer: D

QUESTION 6

DRAG DROP

Drag and drop the boot issues from the left onto the correct solutions on the right.

Select and Place:

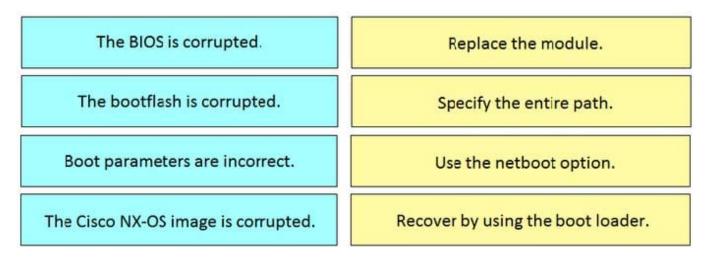

Correct Answer:



The BIOS is corrupted.	
Boot parameters are incorrect.	
The bootflash is corrupted.	
The Cisco NX-OS image is corrupted.	

QUESTION 7

Which configuration is needed to enable manual ESP mode for Fibre Channel TrustSec on Cisco MDS switches?

- A. MDS(config)# interface fc 1/1 MDS(config-if)# fcsp esp manual
- B. MDS(config)# fcsp esp manual
- C. MDS(config)# interface fc 1/1 MDS(config-if)# fcsp mode gcm MDS(config-if-fcsp)# fcsp esp manual
- D. MDS(config)# interface fc 1/1 MDS(config-if)# fcsp esp manual MDS(config-if-fcsp)# mode gcm

Correct Answer: A

QUESTION 8

Which configuration is always required when running the setup utility on a Cisco MDS 9000 Series Switch?

- A. administrator password
- B. management IP address
- C. active NTP server
- D. active default gateway

Correct Answer: A

QUESTION 9

Which configuration is available only in Cisco DCNM-SAN Advanced mode?

A. IVR



- B. VMpath configuration
- C. zoning
- D. template-based provisioning

Correct Answer: A

QUESTION 10

Refer to the exhibit.

MDS-A# show run interface port-channel 2 interface port-channel2 channel mode active
<pre>switchport description ***Connected to FI*** switchport rate-mode dedicated</pre>
MDS-A# sh port-channel database port channel2 Administrative channel mode is active Operational channel mode is active Last membership update succeeded First operational port is fc1/9 2 ports in total, 2 ports up Ports: fc1/9 [up] * fc1/10 [up]

A port channel has been configured between a Cisco MDS and a Cisco Fabric Interconnect switch. Which interface(s) in the port channel carry the control plane traffic?

A. per packet, balanced between interfaces fc1/9 and fc1/10

B. from interface fc1/9

C. from interface fc1/10

D. per flow, balanced between interfaces fc1/9 and fc1/10

Correct Answer: D

<u>300-625 VCE Dumps</u>

300-625 Study Guide

300-625 Exam Questions