

642-737^{Q&As}

Implementing Advanced Cisco Unified Wireless Security (IAUWS) v2.0

Pass Cisco 642-737 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.certbus.com/642-737.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Cisco Official Exam Center

Instant Download After Purchase

100% Money Back Guarantee

😳 365 Days Free Update

800,000+ Satisfied Customers





QUESTION 1

What are the four packet types that are used by EAP? (Choose four.)

- A. EAP Type
- **B. EAP Request**
- C. EAP Identity
- D. EAP Response
- E. EAP Success
- F. EAP Failure
- G. EAP Authentication

```
Correct Answer: BDEF
```

QUESTION 2

On a newly configured wireless network, client data is not reaching the foreign controller when a client needs to roam. What port(s) should be verified as open?

- A. IP Protocol 97
- B. UDP port 166666
- C. TCP ports 443 and 80
- D. UDP ports 161 and 162

Correct Answer: A

QUESTION 3

Which two tools help to provide PCI compliance reports? (Choose two.)

- A. WLC
- B. WCS
- C. MSE
- D. Ekahau Site Survey
- E. AirMagnet WiFi Analyzer

Correct Answer: BE



QUESTION 4

An engineer is responding to a man-in-the-middle attack and needs to enable security features to prevent such attacks in the future. What security feature would prevent a man- in-the-middle attack?

A. Management Frame Protection

B. ACL

- C. Enable client and infrastructure MFP
- D. AAA Override

Correct Answer: C

QUESTION 5

Clients are continually bouncing between APs when a client is on or near the border of two APs. What RF parameter should be adjusted?

- A. Minimum RSSI
- B. Hysteresis
- C. Adaptive Scan Threshold
- D. Transition Time

Correct Answer: B

QUESTION 6

The Cisco WLC v7.0 is configured for external authentication of the management access to the WLC itself using the Cisco Secure ACS v4.2. The management user is limited to read access for all menu options except for full read/write access to the WLAN menu options.

Which two items are required in the Cisco Secure ACS network configuration to enable correct AAA? (Choose two.)

- A. AP IP address
- B. WLC virtual IP address
- C. WLC management IP address
- D. WLC AP management IP address
- E. hostname matching the WLC case-sensitive name
- F. authentication using RADIUS
- G. authentication using TACACS+



Correct Answer: CG

QUESTION 7

802.1X AP supplicant credentials have been enabled and configured on a Cisco WLC v7.0 in both the respective Wireless>AP>Global Configuration location and AP>Credentials tab locations. What describes the 802.1X AP authentication process when connected via Ethernet to a switch?

A. Only WLC AP global credentials are used.

- B. Only AP credentials are used.
- C. WLC global AP credentials are used first; upon failure, the AP credentials are used.

D. AP credentials are used first; upon failure, the WLC global credentials are used.

Correct Answer: B

QUESTION 8

Which three products are required to produce Cisco Clean Air Security reports? (Choose three.)

- A. WLC v7.0
- B. WCS v7.0
- C. MSE v7.0
- D. Spectrum Expert v4.0
- E. 1260 AP
- F. 3500 AP

Correct Answer: ABF


QUESTION 9

Select and Place:



How many different TACACS+ and RADIUS servers ca the right.	an be configured on a Cisco WLC v7.0? Drag the correct r	number on the left to the appropriate authentication prolocol on
1		TACACS+
3		RADIUS
6	5.	
10		
17		
20		
21		

Correct Answer:

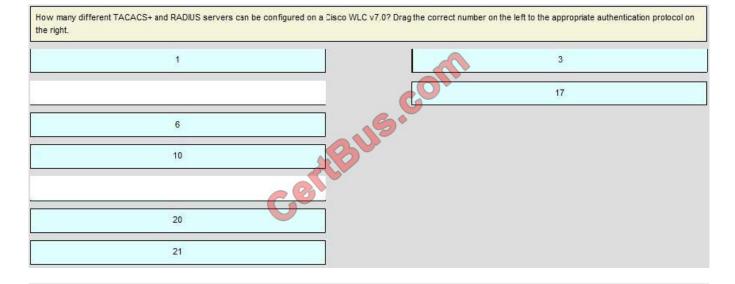

QUESTION 10

Which feature should an engineer select to implement the use of VLAN tagging, QoS, and ACLs to clients based on RADIUS attributes?

- A. per-WLAN RADIUS source support
- B. client profiling
- C. AAA override
- D. captive bypassing
- E. identity-based networking

Correct Answer: C



QUESTION 11

Which three actions must be completed to enable collaboration between a Cisco WLC and Cisco IPS? (Choose three.)

- A. Create a user account on the Cisco IPS for the Cisco WLC.
- B. Define the Cisco WLC as an allowed host on the Cisco IPS.
- C. Define the Cisco IPS as a CIDS sensor on the Cisco WLC.
- D. Create a Cisco IPS profile on the Cisco WLC.
- E. Configure the Cisco WLC to update the shunned client list from the Cisco IPS.
- F. Define a Cisco IPS profile to the WLAN in the Cisco WLC.

Correct Answer: ABC

QUESTION 12

Which EAP protocol(s) can be used by a controller-based AP on Ethernet for 802.1X authentication to a switch?

- A. EAP-LEAP
- **B. EAP-FAST**
- C. EAP-PEAP
- D. EAP-TLS
- E. 802.1X and EAP are not supported on AP-wired Ethernet
- Correct Answer: B

642-737 Practice Test

642-737 Exam Questions

642-737 Braindumps



To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

https://www.certbus.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you. To update a previously submitted ticket:



One Year Free Update



Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.



Money Back Guarantee To ensure that you are spending on quality products, we provide 100% money back guarantee for <u>30 days</u>

from the date of purchase



Security & Privacy

We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.

Any charges made through this site will appear as Global Simulators Limited. All trademarks are the property of their respective owners. Copyright © certbus, All Rights Reserved.