

E20-517^{Q&As}

Symmetrix Solutions Specialist Exam for Storage Administrators

Pass EMC E20-517 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.certbus.com/e20-517.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by EMC
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

Refer to the Exhibit.

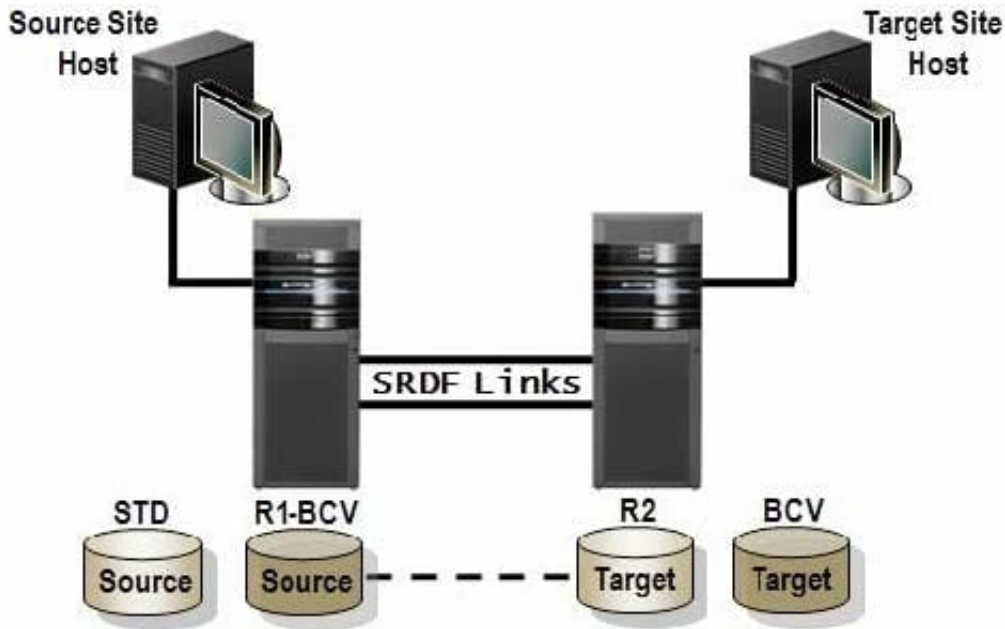

What is the correct state for the Standard and R1-BCV prior to issuing a symreplicate start command?

- A. Synchronized
- B. Split
- C. Suspended
- D. Write Enabled

Correct Answer: A

QUESTION 2

The network link fails between the source and target in an SRDF Environment.

What is the RDF pair state reported by "symrdf query"?

- A. Partitioned
- B. Suspended
- C. Failed Over
- D. Not Ready

Correct Answer: A

QUESTION 3

When using autoprovisioning on a Symmetrix VMAX array, which type of objects can be cascaded?

- A. Initiator Group and Storage Group
- B. Port Group and Storage Group
- C. Initiator Group and Masking View
- D. Masking View and Port Group

Correct Answer: A

QUESTION 4

Under which conditions will Enginuity remove the Consistency Exempt attribute from the RDF mirror?

- A. Deleting RDF pairs
- B. Creating RDF pairs
- C. Splitting RDF pairs
- D. Suspending RDF pairs

Correct Answer: A

QUESTION 5

What types of performance charts can one plot in the Unisphere for VMAX Performance Analyze view?

- A. Diagnostic, Historical and Real Time
- B. Historical and Real Time
- C. Diagnostic, Historical and Trend
- D. Diagnostic and Real Time

Correct Answer: A

QUESTION 6

How many concurrent configuration change sessions can be active at any point on a Symmetrix VMAX?

- A. 2

B. 4

C. 6

D. 8

Correct Answer: B

QUESTION 7

If the default values in Unisphere for VMAX are not changed, which value will trigger a critical alert for Thin Device Usage?

B. 70

C. 75

D. 80

Correct Answer: D

QUESTION 8

Which symconfigure option is used to check command syntax only?

A. Preview

B. Prepare

C. Commit

D. Query

Correct Answer: A

QUESTION 9

Which Solutions Enabler daemon provides centralized gatekeeper device management?

A. storapid

B. storgnsd

C. storsrvd

D. storevntd

Correct Answer: A

QUESTION 10

Multiple RDF groups from different Symmetrix arrays have been grouped together to enable Multi- Session Consistency.

How does cycle switching occur in this configuration?

- A. Cycle switches are controlled by the RDF daemon
- B. Cycle switches always occur simultaneously on all Symmetrix arrays after 30 seconds
- C. Cycle switches are controlled by the master Symmetrix
- D. Cycle switches always occur independently on each Symmetrix after 30 seconds

Correct Answer: A

QUESTION 11

Which component of the Symmetrix VMAX runs the scripts to change the configuration of an array?

- A. Symmetrix Service Processor
- B. Global memory
- C. Back end adapters
- D. Front end adapters

Correct Answer: A

QUESTION 12

SRDF/A MSC has been implemented between sites. The SRDF/A MSC session is being managed by one host on the production site.

What will happen if the management host is shutdown?

- A. SRDF/A cycle switching will stop
- B. SRDF will automatically drop to adaptive copy mode
- C. SRDF links will be suspended immediately
- D. SRDF will automatically go into a partitioned state

Correct Answer: A

QUESTION 13

How are the ports for Federated Tiered Storage configured on a Symmetrix VMAX 40K array?

- A. EMC customer service uses SYMMWIN to convert FA ports
- B. EMC customer service uses SYMCLI to convert FA ports
- C. Anyone can use Unisphere for VMAX to convert RF ports
- D. Anyone can use Unisphere for VMAX to convert FA ports

Correct Answer: A

QUESTION 14

What is recommended before performing a TimeFinder/Clone establish operation?

- A. Clone target devices should not be actively accessed
- B. Clone source devices should not be actively accessed
- C. Clone target devices should be write disabled
- D. Clone source devices should be write disabled

Correct Answer: A

QUESTION 15

Which component is optional during a Solutions Enabler installation?

- A. SRM_COMPONENT
- B. BASE_COMPONENT
- C. SYMCLI_COMPONENT
- D. SYMRECOVER_COMPONENT

Correct Answer: A

[Latest E20-517 Dumps](#)

[E20-517 VCE Dumps](#)

[E20-517 Study Guide](#)