

E20-855^{Q&As}

Networked Storage-SAN Expert for Implementation Engineers

Pass EMC E20-855 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.certbus.com/E20-855.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by EMC
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

Your customer recently added a Celerra to their environment and implemented iSCSI on Windows 2003 servers. They created the IQN name for the Windows servers via a script and the name looked as follows:

iqn.2003-04.com.emc.HostA.0083 The servers cannot see the iSCSI LUNs. What is the reason for this?

- A. The network portal is not reachable
- B. Celerra converts upper case into lower case and Windows does not
- C. Customer download and installed the latest iSCSI driver from Microsoft's website
- D. Customer download and installed the latest iSCSI driver from the HBA vendor's website

Correct Answer: B

QUESTION 2

Where would you look to find iSCSI IQN logins on a DMX?

- A. BIN file
- B. VCMDB
- C. FA Director
- D. Backend Director

Correct Answer: B

QUESTION 3

A customer has merged four DS-32B2 switches to form a full mesh fabric with two ISLs between each switch. They are adding 12 dual-pathed Windows 2k3 Servers and eight storage ports. How many free ports will remain?

- B. 72
- C. 88
- D. 96

Correct Answer: B

QUESTION 4

The customer has 400 identical servers that need to be allocated the same amount of storage space and storage protection. This task is estimated to take 400 man hours. Which ControlCenter Storage Provisioning Services steps will reduce the time it takes to provision storage to 8 man hours?

- A. Create host pool, drag hosts to the host pool, highlight the storage and allocate storage to the hosts
- B. Create storage policy, drag storage to the storage pool, highlight the host and allocate storage to the hosts
- C. Create host and storage pools, drag host pool to the storage pool, highlight host pool and allocate storage to the hosts
- D. Create storage pool, drag storage to the storage pool, create storage policy, highlight the host and allocate storage to the hosts

Correct Answer: D

QUESTION 5

A customer is having trouble merging two DS-16B2 switches. They verified that the firmware and operating parameters are identical on both switches. What is causing the two switches to segment?

- A. The switches have different active zone config
- B. Both switches have the same active zone config
- C. Neither of the switches have an active zone config
- D. One of the switches does not have an active zone config

Correct Answer: A

QUESTION 6

Your customer is booting their dual-attached HP-UX servers from the DMX via an M-series SAN. They are using PowerPath 4.x. Over the weekend they added a new switch and changed some storage cabling. Now they cannot boot up the servers. What is the reason for this?

- A. Customer did not export the zoning information
- B. Customer did not update the masking information in the VCMDB
- C. Customer did not remove the failed links with powermt check
- D. Customer did not delete the hardware path links to the storage prior to the changes

Correct Answer: D

QUESTION 7

The customer wants to consolidate their current SAN consisting of four fully populated ED-64M2s, two DS32M2 switches and two DS-32B2 switches. Current total throughput on the fabric is 614Gb/s. Anticipated growth is 50% increase in throughput over the next two years. The customer wants ED- 140M2. How many ED-140M2's are required considering the future growth?

- A. 2

B. 4

C. 6

D. 8

Correct Answer: B

QUESTION 8

The customer has decided to create an SRDF environment, extending the existing fabric approximately 500 kilometers using FCIP. What is the maximum bandwidth for a T3 circuit?

A. 43.232 megabits per second

B. 155 megabits per second

C. 2.5 gigabits per second

D. 9.6 gigabits per second

Correct Answer: A

QUESTION 9

A Customer is unable to monitor a Connectrix MDS switch from ControlCenter. What must be done for the customer to monitor the switch?

A. Discover the switch in ControlCenter

B. Install On-Alert on ControlCenter server

C. Enable SNMP V1 on the Connectrix MDS

D. Install the Cisco MIBs on the Connectrix MDS

Correct Answer: C

QUESTION 10

A Customer is unable to monitor a Connectrix MDS switch from ControlCenter. What must be done for the customer to monitor the switch?

A. Discover the switch in ControlCenter

B. Install On-Alert on ControlCenter server

C. Enable SNMP V1 on the Connectrix MDS

D. Install the Cisco MIBs on the Connectrix MDS

Correct Answer: C

QUESTION 11

A customer wants to merge eight single DS-32B2 fabrics in a full mesh fabric. What is the total number of ISL ports required?

- A. 14
- B. 16
- C. 98
- D. 112

Correct Answer: D

QUESTION 12

A customer has configured iSCSI devices on a Windows using DHCP. The DHCP lease expired and now the customer can not see the iSCSI devices. The Windows host is using the Microsoft iSCSI driver version

1.0.6 and is connected to an M-series 1620 running firmware 4.4.0. How would you fix the problem?

- A. Reconnect to the iSCSI target
- B. Update the ipaddress in the MS iSCSI Initiator
- C. Reconnect to the M-series 1620, rezone and remask to the storage
- D. Update the ipaddress in the M-series 1620 using Configure > port > iSCSI

Correct Answer: C

QUESTION 13

The customer has added three identical Windows 2000 servers to a DMX through native iSCSI. The first server works fine connecting to LUNs 0-5. The second server works fine connecting to LUNs 6-7. The third server does not see LUNs 8-9. What could be the problem with the third server?

- A. LUNs above 7 not supported for iSCSI
- B. Windows requires a hot fix to see LUNs above 7
- C. Exceeded the maximum allowed logins per SE port
- D. Needs to see LUN 0 before it will see any LUN above 7

Correct Answer: D

QUESTION 14

Using EMC's best practices, what is the maximum number of switches for a full mesh fabric using DS32B2 switches?

- A. 4
- B. 6
- C. 8
- D. 10

Correct Answer: C

QUESTION 15

Which source does the iSCSI channel director get its IP address information from in the Symmetrix environment?

- A. BIN file
- B. VCMDB file
- C. IP switch connection
- D. C and VCM bit settings

Correct Answer: A

[Latest E20-855 Dumps](#)

[E20-855 PDF Dumps](#)

[E20-855 Study Guide](#)

To Read the [Whole Q&As](#), please purchase the [Complete Version](#) from [Our website](#).

Try our product !


100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - [Windows](#), [Mac](#), [Android](#), [iPhone](#), [iPod](#), [iPad](#), [Kindle](#)

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications.
You can view Vendor list of All Certification Exams offered:

<https://www.certbus.com/allproducts>

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket:

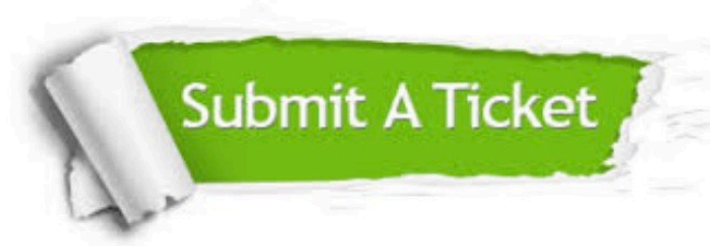

 <p>One Year Free Update Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.</p>	 <p>Money Back Guarantee To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.</p>	 <p>Security & Privacy We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.</p>
---	---	--

Any charges made through this site will appear as Global Simulators Limited.
All trademarks are the property of their respective owners.
Copyright © certbus, All Rights Reserved.