

HPE2-Z40^{Q&As}

Delta - Applying Aruba Switching Fundamentals for Mobility

Pass HP HPE2-Z40 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.certbus.com/hpe2-z40.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

A network administrator wants to form a cluster with several Aruba Instant APs (IAPs). What must the administrator verify?

- A. that all APs are pre-configured with WLANs with the same SSID
- B. that all APs are operating on the same radio channel
- C. that all APs are the same model
- D. that all APs are connected in the same subnet

Correct Answer: A

QUESTION 2

A company wants to deploy Aruba Instant APs (IAPs) at branch offices and have a configuration automatically deployed to the APs.

How can network administrators achieve this goal?

- A. Set up an Aruba Activate account and upload configuration templates and provisioning rules to it.
- B. Set up configuration templates on AirWave and Aruba Activate provisioning rules that direct the Aps to AirWave.
- C. Configure Aruba ClearPass to discover the APs and push configurations to them.
- D. Upload a configuration template on a management station and then connect that station to the Instant SSID.

Correct Answer: C

QUESTION 3

Which settings are required on ArubaOS switches for Aruba AirWave to discover monitor, and manage them?

- A. shared cluster key and an SNMP v2 community or v3 user
- B. SNMP v2 community or v3 user and an HTTPS certificate
- C. credentials for Telnet or SSH login and an SNMP v2 community or v3 user
- D. credentials for Telnet or SSH login and an HTTPS certificate

Correct Answer: A

QUESTION 4

Refer to the exhibit.



An Aruba Instant cluster is added in Aruba AirWave. A network administrator needs to change the cluster management level to Manage Read/Write. The exhibit shows the current status for the cluster. What should the administrator do before changing the management level?

- A. Determine why AirWave cannot contact the cluster and resolve any connectivity issues in the network.
- B. Check the cluster SNMP credentials and resolve the mismatch between the cluster credentials and AirWave credentials.
- C. Investigate why the cluster configuration does not match the group configuration template and resolve any issues.
- D. Verify that the cluster is configured with the same shared key that is configured in the global AirWave settings.

Correct Answer: D

QUESTION 5

Refer to the exhibits.

Exhibit 1

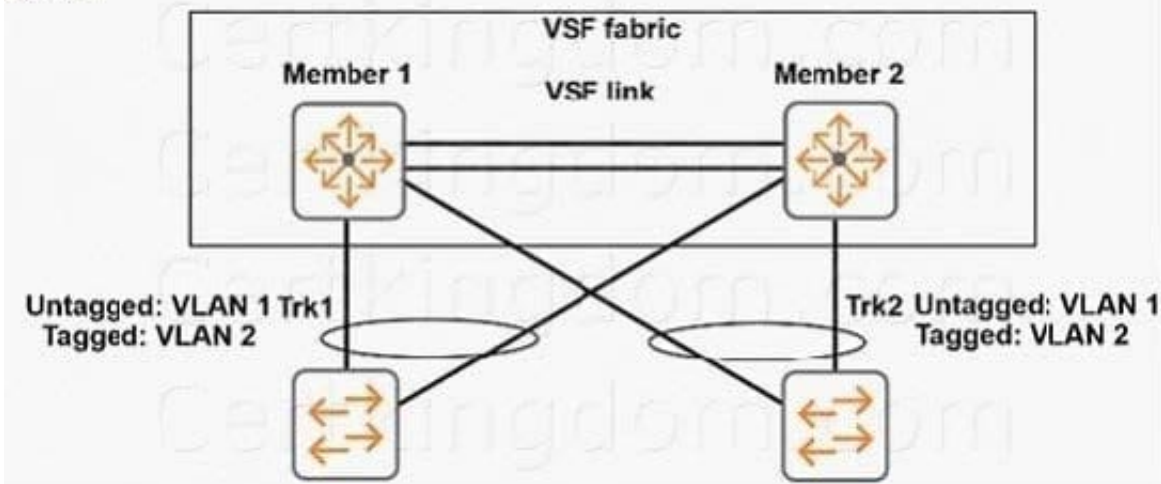


Exhibit 2

```
VSF-Switch# show vsf trunk-designated-forwarder

Trunk Designated Forwarders

NAME  TYPE  Member
-----
Trk1  LACP  1
Trk2  LACP  2
```

A broadcast packet arrives tagged for VLAN 2 on the Member 2 link of Trk2. What does Member 2 do?

- A. It forwards the packet over the VSF link to Member 1, and then Member 1 forwards the packet on its link in Trk1.
- B. It uses LACP to communicate with the commander on the VSF link, and then follows the commander directions.
- C. It uses a hash to select one of the links in Trk1, and then forwards the packet locally or on the VSF link, based on the decision.
- D. It forwards the packet on its local link in Trk1.

Correct Answer: B

QUESTION 6

A company needs a modular switch that can be combined with another modular switch into a single logical fabric. Which ArubaOS switch series meets these criteria?

- A. Aruba 2930F Series
- B. Aruba 3800 Series
- C. Aruba 3810 Series
- D. Aruba 5400R Series

Correct Answer: D

QUESTION 7

A network administrator configures LLDP-MAD on an Aruba Virtual Switching Framework (VSF) fabric. The administrator needs to enter an SNMP community string after v2c in this command: `Switch(config)# vsf lldp-mad ipv4 10.1.0.2 v2c`

Which SNMP community string should the administrator enter?

- A. one configured for the VSF fabric on AirWave.
- B. one configured on the device at 10.1.0.2.
- C. one configured on the standby member in the fabric.
- D. one configured on the VSF fabric as a whole.

Correct Answer: C

QUESTION 8

A network administrator connects several new Aruba Instant APs (at factory defaults) to a switch. After waiting several minutes for the cluster to form, the administrator is ready to provision the cluster. The VLAN on the ports connected to the APs has no DHCP services.

How can the administrator contact the Instant UI and provision the APs with static IP addresses?

- A. Connect to the Instant SSID and open a Web browser.
- B. Access the default IP address, 192.168.1.1, from a device connected in the AP VLAN.
- C. Access the cluster using Aruba Activate.
- D. Access <https://vc.arubanetworks.com> from a device connected in the AP VLAN.

Correct Answer: D

QUESTION 9

A network administrator wants to apply a critical PoE priority to any ArubaOS switch port that connects to an Aruba AP. The priority should be applied dynamically based on LLDP messages received from the AP. Which step should the administrator take to meet this goal?

- A. Configure the PoE usage setting on all ports as `//dp`.
- B. Configure the PoE usage setting on all ports as `class` and make sure that Aruba APs are defined as Class 4 devices.
- C. Enable the default AP profile bound to the Aruba AP device type.
- D. Enable LLDP IVIED TLV extensions on the switch port.

Correct Answer: C

QUESTION 10

What do all devices in the same AirWave folder have in common?

- A. They share firmware auditing settings.
- B. They are viewed together in the APs/Devices page
- C. They share a configuration template.
- D. They have the same monitoring settings, such as polling settings.

Correct Answer: C

[Latest HPE2-Z40 Dumps](#)

[HPE2-Z40 PDF Dumps](#)

[HPE2-Z40 Braindumps](#)