

NS0-181^{Q&As}

NetApp Certified Storage Installation Engineer - ONTAP 9.1

Pass NetApp NS0-181 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.certbus.com/ns0-181.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

You have installed and configured a new AFF C190 cluster with ONTAP 9.7. Your customer wants you to install the latest version of ONTAP. In this scenario, what are two methods to update ONTAP? (Choose two.)

- A. Use the cluster image package get and cluster image update commands.
- B. Use a USB drive with the new software image and let ONTAP automatically boot.
- C. Use ONTAP System Manager to download and install the new software image.
- D. Use ONTAP System Manager to upload and install the new software image.

Correct Answer: AC

QUESTION 2

Click the Exhibit button.

```
Welcome to node setup.
```

```
You can enter the following commands at any time:  
"help" or "?" - if you want to have a question clarified,  
"back" - if you want to change previously answered questions, and  
"exit" or "quit" - if you want to quit the setup wizard.  
Any changes you made before quitting will be saved.
```

```
To accept a default or omit a question, do not enter a value.
```

```
Enter the node management interface port [e0c]:
```

You want to add a FAS2750 HA pair to an existing 6-node cluster.

Referring to the exhibit, which action would you perform to begin adding the node?

- A. Use the back command to begin the Cluster Setup wizard.
- B. Reboot the node and enter maintenance mode and run the Cluster Setup wizard.
- C. Use the node setup wizard and select 0a as the management interface.
- D. Use the exit or quit commands then run the cluster setup command.

Correct Answer: C

Reference: <http://docs.netapp.com/ontap-9/topic/com.netapp.doc.dot-cm-sag/System%20administration.pdf> (35)

QUESTION 3

When you install a new ONTAP 9.7 4-node cluster, which network type is required?

- A. data network
- B. peering network
- C. cluster interconnect
- D. intercluster network

Correct Answer: C

Reference: <https://docs.netapp.com/ontap-9/topic/com.netapp.doc.dot-cm-nmg/Network%20and%20LIF%20management.pdf>

QUESTION 4

What are two ways to identify an AFF All SAN Array system? (Choose two.)

- A. View the ONTAP System Manager system nodes.
- B. View the ONTAP System Manager cluster settings.
- C. Use the cluster image show CLI command.
- D. Use the san config show CLI command.

Correct Answer: AD

Ways to identify an ASA system You can identify an ASA system using ONTAP System Manager or using the ONTAP command line interface (CLI). From the ONTAP System Manager dashboard, you can click on the system nodes. The personality type is displayed as "ASA" for ASA systems. From the CLI, you can use san config show command. The ASA value returns as true for ASA systems

QUESTION 5

You are installing a new ONTAP 9.7 cluster by following the installation and setup poster. You are ready to complete the initial cluster setup. You have connected your laptop to the management switch. However, when browsing the network, you are unable to discover the ONTAP controllers.

Which statement explains this behavior?

- A. You do not have network discovery enabled.
- B. You do not have a static IP address.
- C. You do not have IPv6 configuration set.
- D. You do not have a default gateway set.

Correct Answer: D

QUESTION 6

In ONTAP 9.7 software, how many different replicated databases (RDBs) exist per node?


- A. 2
- B. 5
- C. 3
- D. 4

Correct Answer: B

Reference: <https://www.storagefreak.net/2017/08/netapp-cdot-ontap-9-rdb-and-cluster-replication-ring>

QUESTION 7

Click the Exhibit button.

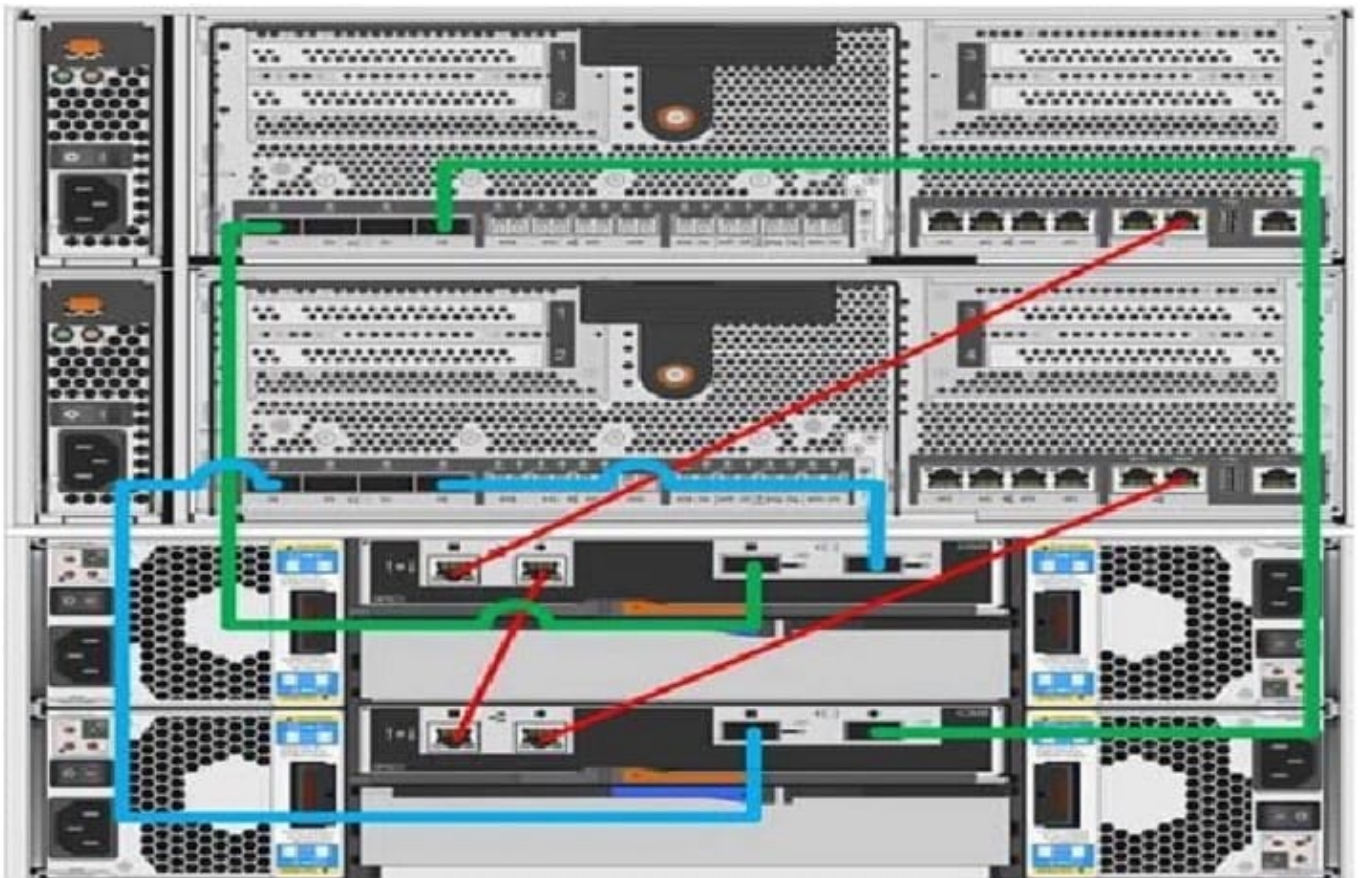

You are adding new DS224C shelves in a new stack to your cluster with FAS8060 controllers running ONTAP 9.7.

Referring to the exhibit, which two actions should be performed to the cluster before installing the new shelves?
(Choose two.)

- A. Move the SAS cables to a new stack.
- B. Enable in-band ACP.
- C. Remove the Ethernet cables.
- D. Disable out-of-band ACP.

Correct Answer: AD

QUESTION 8

You install a 4-node cluster with an AFF A400 HA pair and a FAS8300 HA pair. After setup, you are asked to review the audit logs on each controller from a Web browser. In this scenario, which method provides access to the logs from a Web browser?

- A. ACP
- B. ADP
- C. DNS
- D. SPI

Correct Answer: D

QUESTION 9

One of the nodes in your ONTAP 9.7 cluster has failed and is not coming back online.

Which two methods would you use to connect to the node failing to come back online? (Choose two.)

- A. Use the Intelligent Platform Management Interface.
- B. Use the Service Processor Interface.
- C. Use Secure Shell.
- D. Use Telnet.

Correct Answer: BC

QUESTION 10

You are installing a new AFF A400 cluster for a customer. The customer indicates that they want to take advantage of AutoSupport On Demand. In this scenario, which AutoSupport transport protocol must you use?

- A. HTTP
- B. SMTP

C. FTP

D. HTTPS

Correct Answer: D

Reference: <https://www.netapp.com/media/10438-tr-4444.pdf> (9)

[NS0-181 PDF Dumps](#)

[NS0-181 Practice Test](#)

[NS0-181 Study Guide](#)