

1Z0-052^{Q&As}

Oracle Database 11g: Administration Workshop I

Pass Oracle 1Z0-052 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.certbus.com/1z0-052.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Oracle
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

SQL> CREATE BIGFILE TABLESPACE MRKT

2 DATAFILE '\\u01/app/oracle/oradata/orcl/mrkt.dbf\' size 10M LOGGING

3 EXTENT MANAGEMENT LOCAL SEGMENT SPACE MANAGEMENT AUTO;

Tablespace created.

SQL> ALTER DATABASE DEFAULT TABLESPACE MRKT;

Database altered.

Which two statements are true regarding the MRKT tablespace? (Choose two.)

- A. No more data files can be added to the tablespace.
- B. Segment space is managed by free lists in the tablespace.
- C. A user created without being assigned a default tablespace uses this tablespace.
- D. The tablespace can be dropped with the current setting with segments present in it.

Correct Answer: AC

QUESTION 2

In which of the scenario will the DBA perform recovery? (Choose all that apply.)

- A. The alert log file is corrupted
- B. A tablespace is accidentally dropped
- C. One of the redo log members is corrupted
- D. A database user terminates the session abnormally
- E. The hard disk on which the data files is stored is corrupted

Correct Answer: BE

QUESTION 3

Identify the logical structure that will never have more than one data segment created for it.

- A. external table
- B. partitioned table
- C. partitioned index

- D. nonclustered table
- E. global temporary table

Correct Answer: D

QUESTION 4

Which are three of the various resources that must be accessible to keep a database open?

- A. SYSTEM tablespace
- B. spfile
- C. all members of a redo log group
- D. SYSAUX tablespace
- E. control file

Correct Answer: ADE

QUESTION 5

Which statement is true about loading data using the conventional path of SQL*Loader?

- A. Redo is not generated while performing conventional path loads
- B. Only PRIMARY KEY, UNIQUE KEY and NOT NULL constraints are checked
- C. No exclusive locks are acquired when the conventional path loads are performed
- D. Instead of performing transactions, SQL*Loader directly writes data blocks to the data files
- E. INSERT triggers are disabled before the conventional path load and reenabled at the end of the load

Correct Answer: C

QUESTION 6

Examine this LISTENER.ORA file:

```
LISTENER =  
  (DESCRIPTION_LIST =  
    (DESCRIPTION =  
      (ADDRESS_LIST =  
        (ADDRESS = (PROTOCOL = TCP) (HOST = srv1.example.com) (PORT = 1522))  
      ))  
  )  
  SID_LIST_LISTENER =  
    (SID_LIST =  
      (SID_DESC =  
        (GLOBAL_DBNAME = orcl.example.com)  
        (ORACLE_HOME = /u01/app/oracle/product/11.2.0/dbhome_1)  
        (SID_NAME = orcl)  
      )  
    )
```

How should you configure and start an additional listener LISTENER2 that listens for the same SID?

- A. Create another configuration file called LISTENER2.ORA with only LISTENER2 details in it
- B. Add LISTENER2 and its SID_LIST details separately under the name LISTENER2 in LISTENER.ORA
- C. Add relevant details in DESCRIPTION under the existing LISTENER with a different port number in LISTENER.ORA
- D. Add relevant details in SID_LIST_LISTENER under the existing LISTENER in LISTENER.ORA

Correct Answer: B

QUESTION 7

Which is true about the SYSTEM and SYSAUX tablespaces?

- A. Both tablespaces can be used for temporary storage if no temporary tablespace is defined
- B. Both tablespaces must be online for a database to be accessible
- C. The SYSAUX tablespace can be made read-only but the SYSTEM tablespace cannot
- D. Only the SYSTEM tablespace contains data dictionary tables

Correct Answer: C

QUESTION 8

Which two statements are true regarding listeners? (Choose two.)

- A. Listeners use only the TCP/IP protocol.
- B. Multiple listener processes can run simultaneously on a host.
- C. Multiple database instances can be registered with a single listener.

- D. The listener-related errors can be traced only at the administrative level.
- E. Only one database instance can be registered with a single listener at any time.

Correct Answer: BC

QUESTION 9

Examine the following output:

```
SQL> SELECT index_name,status  
       FROM dba_indexes  
       WHERE status='UNUSABLE';
```

INDEX_NAME	STATUS
EIND	UNUSABLE

Which two statements about the above index are true? (Choose two.)

- A. It is ignored by the query optimizer.
- B. It is not used while the index is being rebuilt.
- C. The index cannot be rebuilt, and has to be re-created.
- D. The index is automatically rebuilt when used the next time.

Correct Answer: AB

QUESTION 10

Identify the two situations in which you use the alert log file in your database to check the details. (Choose two.)

- A. Running a query on a table returns "ORA-600: Internal Error."
- B. Inserting a value in a table returns "ORA-01722: invalid number."
- C. Creating a table returns "ORA-00955: name is already used by an existing object."
- D. Inserting a value in a table returns "ORA-00001: unique constraint (SYS.PK_TECHP) violated."
- E. Inserting a row in a table returns "ORA-00060: deadlock detected while waiting for resource."

Correct Answer: AE

QUESTION 11

You are working on an instance started using the SPFILE. You want to move the Flash Recovery Area of your database to a new location. You want the Flashback log files to be stored in the new location. Given below are the steps to accomplish the task in random order:

- 1) Shut down the instance.
- 2) Change the value of the DB_RECOVERY_FILE_DEST initialization parameter to a new value.
- 3) Execute the ALTER DATABASE FLASHBACK OFF command.
- 4) Start up the instance and mount the database.
- 5) Execute the ALTER DATABASE FLASHBACK ON command.
- 6) Open the database.

Select the correct order in which these tasks need to be performed.

- A. 2, 1, 4, 3, 5, 6
- B. 1, 4, 3, 2, 6, 5
- C. 1, 4, 2, 6, 3, 5
- D. 3, 2, 1, 4, 5, 6

Correct Answer: A

QUESTION 12

Examine the values for the following initialization parameters:

FAST_START_MTTR_TARGET=0

LOG_CHECKPOINT_INTERVAL=0


Which two will be the implications of these values in your database? (Choose two.)

- A. The SGA advisor will be disabled
- B. The MTTR advisor will be disabled
- C. Automatic checkpoint tuning will be disabled
- D. Checkpoint information will not be written to the alert log file

Correct Answer: BC

QUESTION 13

View the Exhibit.

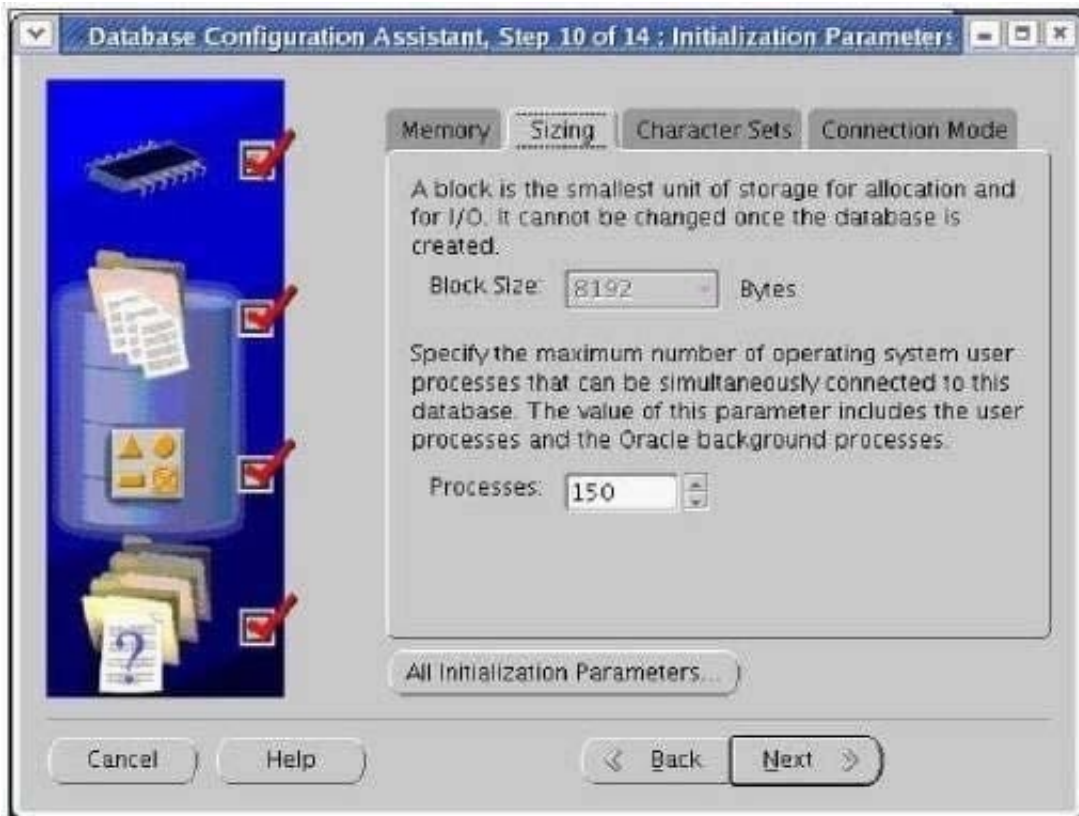

You are creating an additional database by using the Database Configuration Assistant (DBCA). You opted to create a General Purpose database and during the database creation realize that the Block Size field is not enabled.

What could be the reason for this?

- A. You have chosen the File System option as the storage option.
- B. You have chosen the Automatic Storage Management (ASM) as the storage option.
- C. The data block size can be increased only when DBCA is invoked from Oracle Universal Installer (OUI).
- D. You are using General Purpose template and not the Custom Database template to create the database.

Correct Answer: D

QUESTION 14

Identify three situations in which you would NOT be able to drop a tablespace. (Choose three.)

- A. when the tablespace is online
- B. when the tablespace has segments with data in it
- C. when the tablespace is a default permanent tablespace for the database
- D. when the tablespace contains a table that is currently being used by transactions
- E. when the tablespace contains undo data that is needed to rollback an uncommitted transaction

Correct Answer: CDE

QUESTION 15

View the Exhibit and examine the initialization parameter settings.

```
SQL> show parameter target
```

NAME	TYPE	VALUE
archive_lag_target	integer	0
db_flashback_retention_target	integer	1440
fast_start_io_target	integer	0
fast_start_mttr_target	integer	0
memory_max_target	big integer	0
memory_target	big integer	0
pga_aggregate_target	big integer	150M
sga_target	big integer	408M

Which three initialization parameters are to be set manually as they are not automatically tuned? (Choose three.)

- A. LOG_BUFFER
- B. SORT_AREA_SIZE
- C. JAVA_POOL_SIZE
- D. STREAMS_POOL_SIZE
- E. DB_16K_CACHE_SIZE
- F. DB_KEEP_CACHE_SIZE

Correct Answer: AEF

[1Z0-052 PDF Dumps](#)

[1Z0-052 Exam Questions](#)

[1Z0-052 Braindumps](#)