

MCD-LEVEL1-DELTA^{Q&As}

MuleSoft Certified Developer - Level 1 (Mule 4) DELTA

Pass Mulesoft MCD-LEVEL1-DELTA Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.certbus.com/mcd-level1-delta.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Mulesoft
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

Refer to the exhibit.

```
##RAML 1.0
title: Accounts API
version: 1.0

/accounts:
  get:
    description: Get all accounts
    responses:
      200:
        body:
          application/json:
            example:
              id: "48292"
              name: Geordi La Forge
              address: 1 Forge Way, Midgard, CA 95928
              customer_since: "2014-01-04"
              balance: 4829.29
  post:
    description: Create an account
    body:
      application/json:
        example:
          name: Geordi La Forge
          address: 1 Forge Way, Midgard, CA 95928
          customer_since: "2014-01-04"
```

What data is expected by the POST /accounts endpoint?

- A.
- ```
{
 "id": "48292",
 "name": "Geordi La Forge",
 "address": "1 Forge Way, Midgard, CA 95928",
 "customer_since": "2014-01-04",
 "balance": 4829.29
}
```
- B.
- ```
<item>  
  <id>48292</id>  
  <name>Geordi La Forge</name>  
  <address>1 Forge Way, Midgard, CA 95928</address>  
  <customer_since>2014-01-04</customer_since>  
  <balance>4829.29</balance>  
</item>
```
- C.
- ```
<item>
 <name>Geordi La Forge</name>
 <address>1 Forge Way, Midgard, CA 95928</address>
 <customer_since>2014-01-04</customer_since>
 <balance>4829.29</balance>
 <bank_agent_id>48-SJT-282924-KL</bank_agent_id>
</item>
```
- D.
- ```
{  
  "name": "Geordi La Forge",  
  "address": "1 Forge Way, Midgard, CA 95928",  
  "customer_since": "2014-01-04",  
  "balance": 4829.29  
  "bank_agent_id": "48-SJT-282924-KL"  
}
```

A. Option A

B. Option B


C. Option C

D. Option D

Correct Answer: D

QUESTION 2

Refer to the exhibits.

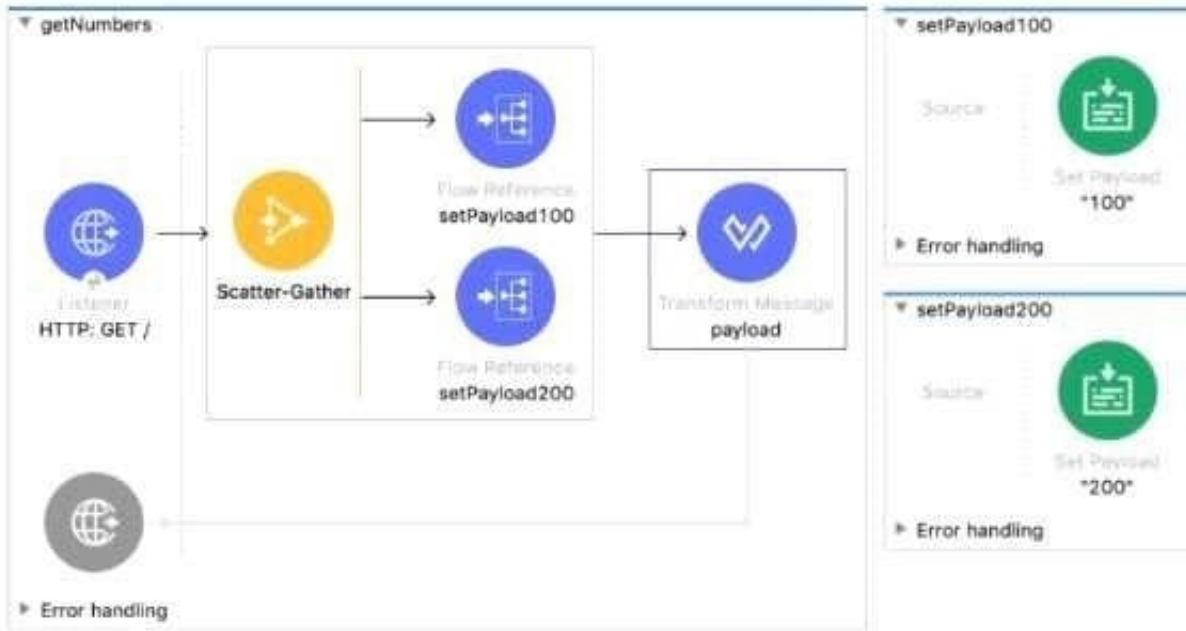

```
<flow name="getNumbers" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_Listener_config" path="/" />
  <scatter-gather doc:name="Scatter-Gather" >
    <route >
      <flow-ref doc:name='setPayload100' name='setPayload100' />
    </route>
    <route >
      <flow-ref doc:name="setPayload200" name="setPayload200" />
    </route>
  </scatter-gather>
  <ee:transform doc:name="payload">
    <ee:message >
      <ee:set-payload ><![CDATA[%dw 2.0
        output application/json
        ---
        payload]]></ee:set-payload>
    </ee:message>
  </ee:transform>
</flow>
<flow name="setPayload100" ><set-payload value='#[ "100" ]' doc:name=' "100" ' /></flow>
<flow name="setPayload200" ><set-payload value='#[ "200" ]' doc:name=' "200" ' /></flow>
```

The input array of strings is processed by the batch job that processes, filters, and aggregates the values. What is the last message logged by the Logger component after the batch job completes processing?

- A.

```
[
  {
    "attributes": ...,
    "payload": "100"
  },
  {
    "attributes": ...,
    "payload": "200"
  }
]
```
- B.

```
{
  "0": "100",
  "1": "200"
}
```
- C.

```
["100", "200"]
```
- D.

```
{
  "0": {
    "attributes": ...,
    "payload": "100"
  },
  "1": {
    "attributes": ...,
    "payload": "200"
  }
}
```

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: C

QUESTION 3

Refer to the exhibit.

In the execution of the Scatter-Gather, the "sleep 1 sec" Flow Reference takes about 1 second to complete, and the "sleep 5 sees" Row Reference takes about 5 seconds to complete. About how many seconds does it take from the time the Scatter-Gather is called until the Set Payload transformer is called?




- A. 0
- B. 1
- C. 5
- D. 6

Correct Answer: C

QUESTION 4

Refer to the exhibits.

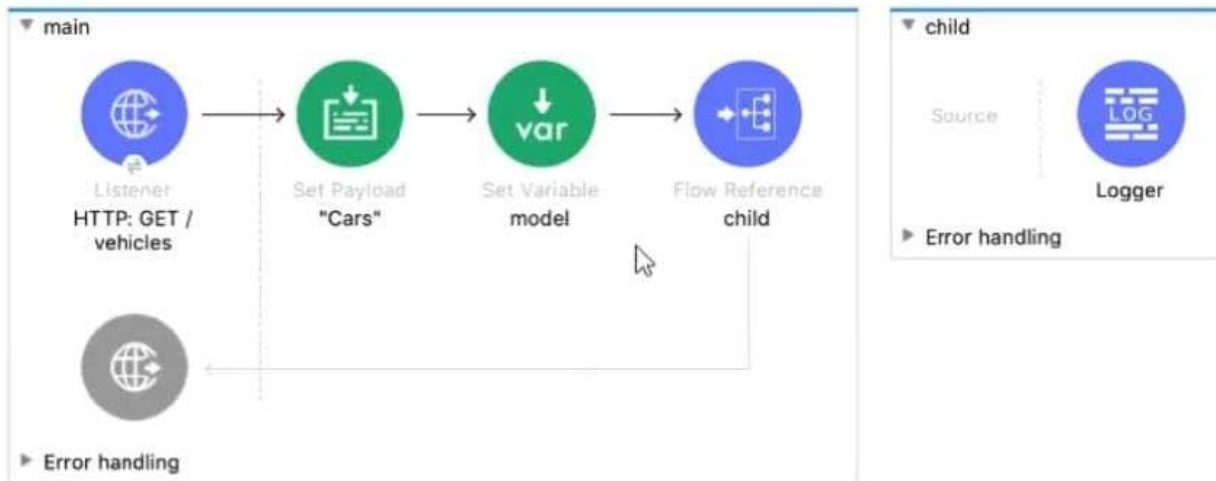

The main flow contains a Flow Reference to the child flow. A web client sends a GET request to the main flow's HTTP Listener that includes a make query parameter.

What values are accessible in the child flow?

- A. payload
- B. payload make query param
- C. payload model var
- D. payload make query param model var

Correct Answer: D

QUESTION 5

By default, what happens to a file after it is read using an FTP connector Read operation?

- A. The file is deleted from the folder
- B. The file is moved to a different folder
- C. The file stays in the same folder unchanged
- D. The file is renamed in the same folder

Correct Answer: C

QUESTION 6

Refer to the exhibits.


```

<flow name="main">
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_Listener_config" path="/" />
  <set-payload value="Success - Begin" doc:name="Success - Begin" />
  <http:request method="GET" doc:name="HTTP: GET /data" url="http://mu.learn.mulesoft.com/data"/>
  <set-payload value="Success - End mainFlow" doc:name="Success - End" />
  <error-handler >
    <on-error-continue enableNotifications="true" logException="true" doc:name="On Error Continue">
      <set-payload value="Error" doc:name="Error" />
    </on-error-continue>
  </error-handler>
</flow>
    
```

A web client submits a request to the HTTP Listener and the HTTP Request throws an error. What payload and status code are returned to the web client? Refer to the exhibits. A web client submits a request to the HTTP Listener and the HTTP Request throws an error.

What payload and status code are returned to the web client?

- A. Response body: "Error" Default response status code: 200
- B. Response body: "Success - Begin*" Default response status code: 200
- C. Error response body: error, description Default error response status code: 500
- D. Response body: "Success - End" Default response status code: 200

Correct Answer: A

QUESTION 7

How many Mule applications can run on a CloudHub worker?

- A. At most one
- B. None of these
- C. Depends
- D. At least one

Correct Answer: A

QUESTION 8

Refer to the exhibits. A web client submits a request to `http://localhost:8081/flights?destination=SFO` and the Web Service Consumer throws a `WSC:BAD_REQUEST` error.

What is the next step to fix this error?



```

.....
Message           : Cannot build default body request for operation [findFlight], the operation requires input
parameters.
Error type        : WSC:BAD_REQUEST
Element           : 10.02.06-soaperrorFlow/processors/0 @ 10.02.06-soaperror:10.02.06-soaperror.xml:21 (Consume)
Element XML      : <wsc:consume doc:name="Consume" doc:id="49a84a74-2848-4a65-b93f-dcbf59fd4412" config-
ref="Web_Service_Consumer_Config" operation="findFlight"></wsc:consume>
.....
    
```

(set debug level logging or '-Dmule.verbose.exceptions=true' for everything)

- A. Set a header in the Consume operation equal to the destination query parameter
- B. set a SOAP payload before the Consume operation that contains the destination query parameter
- C. set a property in the Consume operation equal to the destination query parameter
- D. set a JSON payload before the Consume operation that contains the destination query parameter

Correct Answer: B

QUESTION 9


According to MuleSoft. what is the first step to create a Modern API?

- A. Gather a list of requirements to secure the API
- B. Create an API specification and get feedback from stakeholders
- C. Performance tune and optimize the backend systems and network
- D. Create a prototype of the API implementation

Correct Answer: B

QUESTION 10

Refer to the exhibits.

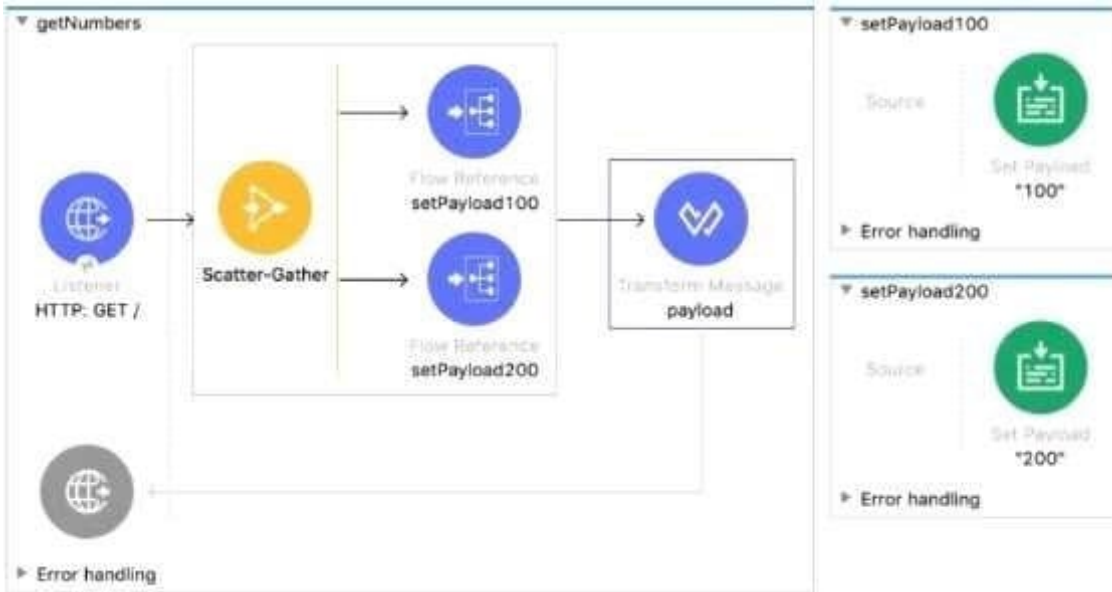

```
<flow name="getNumbers" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_Listener_config" path="/" />
  <scatter-gather doc:name="Scatter-Gather" >
    <route >
      <flow-ref doc:name='setPayload100' name='setPayload100' />
    </route>
    <route >
      <flow-ref doc:name="setPayload200" name="setPayload200" />
    </route>
  </scatter-gather>
  <ee:transform doc:name="payload">
    <ee:message >
      <ee:set-payload ><![CDATA[%dw 2.0
        output application/json
        ---
        payload]]></ee:set-payload>
    </ee:message>
  </ee:transform>
</flow>
<flow name="setPayload100" ><set-payload value='#["100"]' doc:name="100" /></flow>
<flow name="setPayload200" ><set-payload value='#["200"]' doc:name="200" /></flow>
```

Each route in the Scatter-Gather sets the payload to the number shown in the label. What response is returned to a web client request to the HTTP Listener?

A.

```
[  
  {  
    "attributes": ...,  
    "payload": "100"  
  },  
  {  
    "attributes": ...,  
    "payload": "200"  
  }  
]
```

B.

```
{  
  "0": "100",  
  "1": "200"  
}
```

C.

```
["100", "200"]
```

D.

```
{  
  "0": {  
    "attributes": ...,  
    "payload": "100"  
  },  
  "1": {  
    "attributes": ...,  
    "payload": "200"  
  }  
}
```

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: C

QUESTION 11

Where are values of query parameters stored in the Mule event by the HTTP Listener?

A. Payload

B. Attributes

C. Inbound Properties

D. Variables

Correct Answer: B

In Mule4 - #[attributes.queryParams.{parameterName}]

QUESTION 12

Refer to the exhibit.

The error occurs when a project is run in Anypoint Studio. The project, which has a dependency that is not in the MuleSoft Maven repository, was created and successfully run on a different computer. What is the next step to fix the error to get the project to run successfully?

```
[WARNING] The POM for com.mulesoft.training:mock-servers:jar:1.1.2 is missing, no dependency information available
[INFO] -----
[INFO] BUILD FAILURE
[INFO] -----
[INFO] Total time: 0.253 s
[INFO] Finished at: 2018-06-14T10:52:39-07:00
[INFO] Final Memory: 190M/867M
[INFO] -----
[ERROR] Failed to execute goal on project app-server: Could not resolve dependencies for project com.mycompany:app-server:mule-application:1.0.0-SNAPSHOT: Failure to find com.mulesoft.training:mock-servers:jar:1.1.2 in https://repository.mulesoft.org/nexus-ee/content/repositories/releases-ee/ was cached in the local repository, resolution will not be reattempted until the update interval of MuleRepository has elapsed or updates are forced -> [Help 1]
```

A. Edit the dependency in the Mule project's pom.xml file

B. Install the dependency to the computer's local Maven repository

C. Deploy the dependency to MuleSoft's Maven repository

D. Add the dependency to the MULE_HOME/bin folder

Correct Answer: B

QUESTION 13

What is the use of API Notebooks?

- A. None of these
- B. Test Policies
- C. Test API functions
- D. Test RAML

Correct Answer: C

QUESTION 14

Where does a deployed flow designer application run in Anypoint Platform?

- A. CloudHub worker
- B. API Manager
- C. Design Center
- D. Exchange

Correct Answer: A

QUESTION 15

A Set Variable component saves the current payload to a variable.

What is the DataWeave parent expression to access the variable?

- A. #[value]
- B. #[vars]
- C. #[var]
- D. #[values]

Correct Answer: B

[MCD-LEVEL1-DELTA
Practice Test](#)

[MCD-LEVEL1-DELTA Exam
Questions](#)

[MCD-LEVEL1-DELTA
Braindumps](#)